


RGB, CGA to VGA Converter (LCD suitable) ID- 000077

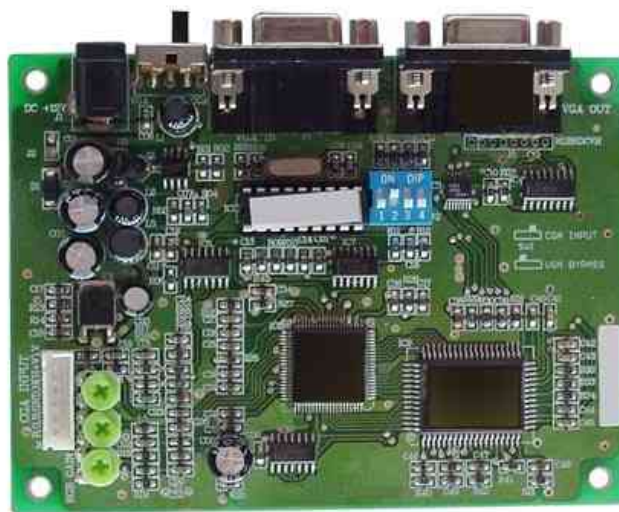

Operation Manual

Introduction

This unit converts RGB/CGA to VGA allowing a 15k signal to be displayed on a PC or TFT monitor at 640 x 480.


Precautions

1. Do not expose this product to direct sunlight.
2. Keep the unit away from radiator, heat sources and magnetic field.
3. Do not place it in very dusty or humid locations.
4. Use this unit in a horizontal position only.
5. Do not put heavy objects on top of the converter.
6. Put the unit in an open space that has good ventilation.
7. If the unit is acting abnormally keep the unit away from TV or other electronic equipment.
8. Unplug the unit from the power supply when it is not to be used for a long period of time.

Features

- CGA game board signal can display on a PC Monitor or TFT monitor.
- Designed for low picture noise and detects a wide range in a game.
- Low-resolution enhance to high-resolution.
- Enhances sharpness and tiny pixels.
- Supports CGA and VGA input select by bypass Switch.
- Supports multi-game board select by 16ch DIP Switch.
- RGB gain by 3 VR

Diagram and Key

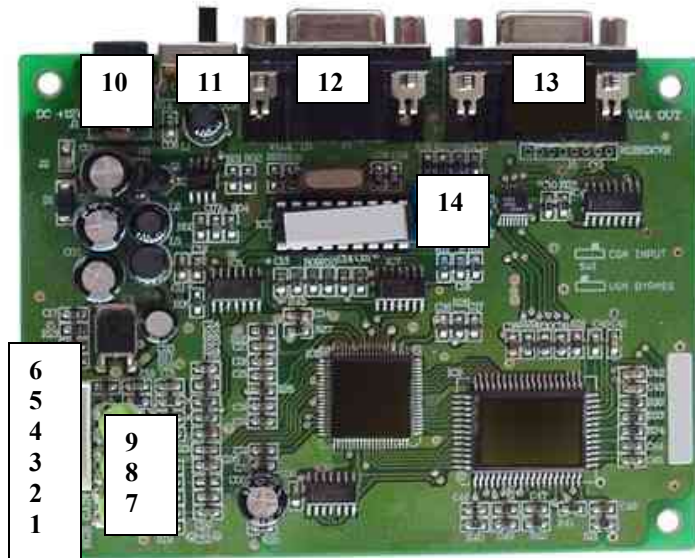

1	CGA Input 1-R	CGA Input 2- R
2	CGA Input 1-G	CGA Input2- G
3	CGA Input 1-B	CGA Input 2- B
4	CGA Input 1-GND	CGA Input 2- GND
5	CGA Input 1-H+V	CGA Input 2- H
6	CGA Input 1-NC	CGA Input 2- V
7	RGB Gain Adjust-R	
8	RGB Gain Adjust-G	
9	RGB Gain Adjust-B	
10	DC Jack	
11	VGA Bypass Switch	
12	VGA Bypass Input	
13	VGA Output	
14	Dipswitch- 1,2,3,4	

Specifications

Power Supply	DC 8-16V Consumption- 2.0W maximum
Signal	Input 1 Sync Combination CGA- Video- Analog RGB 1-5Vpp/1KW (Adjust by VR) CGA- Sync- Negative/Positive, H/V TTL 3.5-5.0Vp-p Input 2 Sync Separation CGA- Video- Analog RGB 1-5Vp-p/1K (Adjust by VR) CGA-Sync- Negative/Positive, H/V TTL 3.5-5.0Vpp Input 3- SVGA Bypass SVGA-Video-Analog RGB 0.7Vp-p/7.5W SVGA-Sync- Negative/Positive Separate TTL 5.0Vp-p Output VGA/SVGA- Video- Analogue RGB 0.7Vp-p/75 ohm VGA/SVGA- Sync- Negative Separate- TTL 5.0 Vp-p
Video Connector	Input 1 CGA- 6 PIN (R, G, B, GND, H/V, NC). Input 2 CGA-6 PIN (R, G, B, GND, H, V). Input 3 SVGA- 15- Pin D-Sub (Standard) Output VGA/SVGA- 15 Pin D-Sub (Standard).
User Controls	VGA Bypass Switch VR (RGB Gain Adjust) DIP SW (Select Game Board)
Environmental Limits	Operating Temperature- 0 ~ 55 degrees Storage Temperature- -20 ~ 70 degrees
Weight	170 grams
Dimensions	14.5 x 116 x 92 mm

Factory Preset Modes

Mode	Input	Input	Output	Output
Timing	H- Freq (KHz)	V-Freq (Hz)	H-Freq (KHz)	V. Freq (Hz)
Input 1 Sync Combine	15.45 15.6 15.6	60 59.1 55.3	30.9 31.2 31.2	60 59.1 55.3
Input 2 Sync Separate	14.5~16.5	50~65	29~33	50~65
Input 3 VGA/SVGA Bypass	All VGA/SVGA Type	All VGA/SVGA Type	Same Input	Same Input

CH	DIP Switch 4 3 2 1	Game Board Name	CH	DIP Switch 4 3 2 1	Game Board Name
1	XXXX	Normal ICB CM 99, SUBSINO	9	OXXX	PSIKYO
2	XXXO	CYE	10	OXXO	BIGIGO
3	XXOX	IGS	11	OXOX	
4	XXOO	AMATIC	12	OXOO	
5	XOXX	JOLLY JOKER	13	OOXX	
6	XOXO	WITCH GAME	14	OOXO	
7	XOOX	CUTY LINE	15	OOOX	
8	XOOO	DYNA X	16	OOOO	SEPARATE SYNC

NOTE:

O- On

X-Off